

*It's more than
a data recorder...*

MultiCon CMC-99

- ▣ compact multichannel controller with data logging capabilities
- ▣ 48 analogue / digital inputs max.
- ▣ 24 thermocouple / 12 RTD inputs max.
- ▣ 8 current, or 16 relay / SSR outputs max.
- ▣ 3.5" TFT, 320 x 240 pixels, touchscreen navigation




The **MultiCon CMC-99** is a powerful and versatile compact-multichannel-controller with a capability to record data, if the recording function is requested and activated. Thanks to that it is one of the first industrial devices which integrates advanced control functions (PID, ON/OFF, time & profiles etc.) and logging of setpoints, excitations and current state of controlled objects. Based on Linux firmware, is stable and the touch screen makes configuration easy and comfortable and data presentation also readable and attractive. Although the **MultiCon CMC-99** is build in a quite small housing, it can integrate up to 48 inputs, and its construction allows user almost free configuration by choosing up to 3 from 16 available input/output modules. The device can simultaneously record all build-in logical channels (60), and is capable to record data with maximum speed 10Hz (ten samples per second, with some limitation of number of recorded channels). 1.5GB of internal data memory is enough for continuous recording of all channels with a speed of 1 sample per second (each channel) for over 50 days (250 000 000 samples in total!).



An operator can download stored data using a USB flash disk or via Ethernet.

- 3.5" TFT display, 320 x 240 pixels,
- Linux operating system,
- control of multiple outputs from a single input value,
- control of outputs from logical combination of several inputs,
- direct connection of external sensors,
- direct connection of external actuators,
- PID process control,
- flexible display modes: numeric, bargraph, graph,
- programming via touchscreen, PC mouse or a keyboard.

Exemplary pin assignment

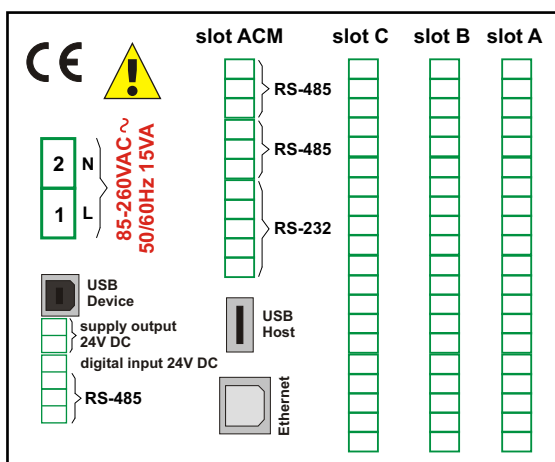

An example of what the display looks like

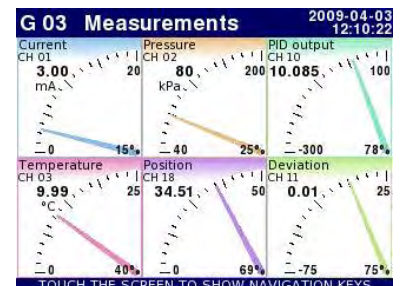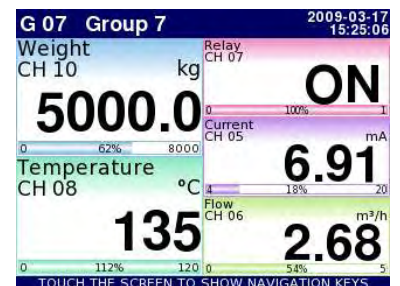

Technical data

Power supply: 19V ÷ 50V DC; 16V + 35V AC or 85 ÷ 260V AC/DC, all separated
Power consumption: 15 VA typical; 20 VA max.

Display: 3.5" graphic TFT, 16-bit colour, 320 x 240 pixels, with touchscreen

Measuring inputs:

- 48 analogue inputs (0/4-20 mA, 0/1-5V or 0/2-10V) max.
- 48 digital inputs max.
- 24 Thermocouple inputs (J, K, S, T, N, R, B, E) max.
- 12 RTD inputs (Pt100, Pt500, Pt1000, Cu50, Cu100; 2-, 3-, 4-wires) max.

Digital input: 1 x 24V DC, optocoupled

Sensor supply: 24 V DC ± 5% (200 mA max. for version with current inputs)

Outputs: - 8 analog (4-20 mA)

- 16 relay (1A/250V) / SSR outputs or 4 relay 5A/250V max.

Remote inputs and outputs available, via RS-485/Modbus RTU

Communication interface:

standard: RS-485 (Modbus RTU), 1 x USB Host, USB Device

enhanced version (incl. ACM module): 2 x RS-485, 1 x RS-485/232, 1 or 2 x USB Host, 1 x USB Device, 1 x Ethernet 10 MB

Protection:

IP 65 (front), available options: additional frame IP 65 for panel cut-out sealing, transparent door STD-99, see: accessories
 version with front USB: a) IP 40, b) IP 54 (when fitted with STD-99 transparent door, see: accessories)

Data memory: internal 1.5 GB, over 50 days (250 000 000 samples)

Working temperature: 0°C to +50°C

Storage temperature: -10°C to +70°C

Case style: panel mounting

Case material: NORYL - GFN2S E1

Case dimensions: 96 x 96 x 100 mm


Panel cut-out dimensions: 90.5 x 90.5 mm

Installation depth: 102 mm min.

Panel thickness: 5 mm max.

Optional PC software

DAQ Manager Software

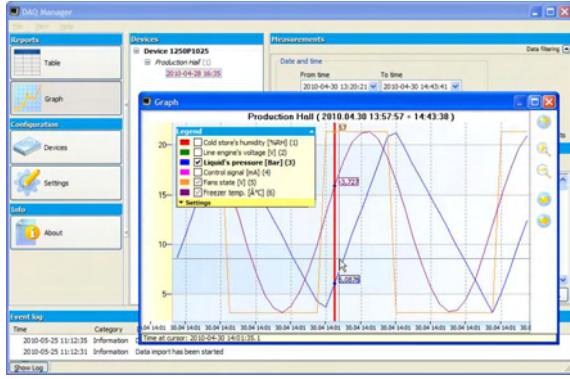

The **DAQ Manager** software allows visualization of recorded measurements in the form of graphs or tables, collecting results into groups, creating and printing reports and also exporting data to external files. The **DAQ Manager** Software can be delivered on CD (Software Box) or downloaded directly from www.simex.pl (at no charge). Each CMC-99 is delivered as a multichannel controller with 1 month free licence for data logging, what allows you to use the device fully functional. For unlimited use of CMC as a data logger an individual licence key is required (a sequence of numbers and letters) for each device.

Ordering

MultiCon CMC-99-A/B/C-1-X-XX1

slot A:		slot B:		slot C:		options:	
E	UI4	E	UI4	E	UI4	00	: no options (rear USB Host)
UI4	UI8	UI4	UI8	UI4	UI8	01	: IP 65 frame (rear USB Host)
UI8	UI16	UI8	UI16	UI8	UI16	0B	: front USB Host (IP 40)
UI16	RT4	UI16	RT4	UI16	RT4	0C	: 2 x USB Host (IP 40)
RT4	TC4	RT4	TC4	RT4	TC4	0G	: ACM module (IP 40)
TC4	TC8	TC4	TC8	TC4	TC8	0H	: IP 65 frame + ACM module (rear USB Host)
TC8	D8	TC8	D8	TC8	D8	0K	: front USB Host + ACM module (IP 40)
D8	D16	D8	D16	D8	D16		
D16	R81	D16	R81	D16	R81		
R81	IO2	R81	IO2	R81	IO2		
IO2	IO4	R45	IO4	R45	IO4		
IO4		S8		S8			
		S16		S16			
		IO2		IO2			
		IO4		IO4			


power supply:
 3 : 24V AC/DC
 4 : 85V ÷ 260V AC/DC

Specification:

- E : empty
- UI4 : 4 x voltage input + 4 x current input
- UI8 : 8 x voltage input + 8 x current input
- UI16 : 16 x voltage input
- I16 : 16 x current input
- RT4 : 4 x RTD input
- TC4 : 4 x TC input
- TC8 : 8 x TC input
- D8 : 8 x digital input
- D16 : 16 x digital input
- R81 : 8 x SPST relay 1A
- R45 : 4 x SPDT relay 5A
- S8 : 8 x SSR output
- S16 : 16 x SSR output
- IO2 : 2 x 4-20 mA outputs
- IO4 : 4 x 4-20 mA outputs
- ACM: Advanced Communication Module includes 1 x RS-485, 1 x RS-485/232, 1 x USB Host, 1 x Ethernet 10 MB

Typical applications

- central temperature measurement and control system,
- multi zone heater controller,
- intermediate pumping station control system,
- spraying and heating control system for glasshouse.

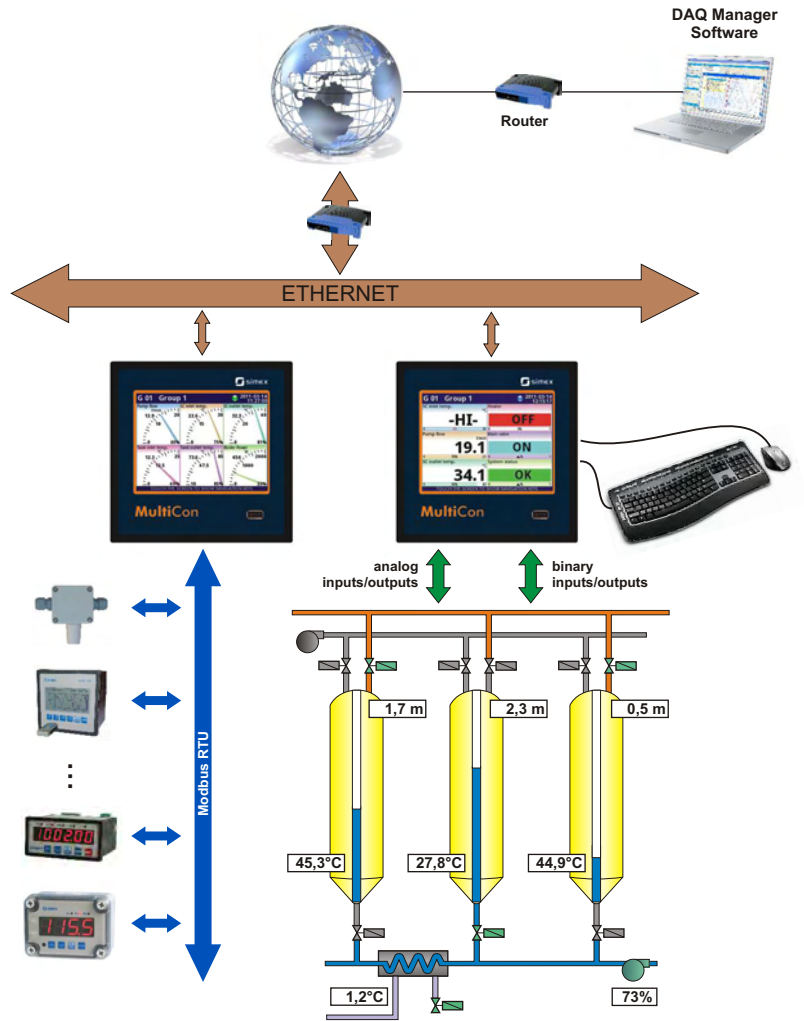

Accessories

STD-99
 Transparent door with moulded frame acc. to DIN 43700, lockable with security key. Door and frame are made by injection moulding thus assuring an exact fit, an optimal choice of a material which is very strong and with no risk of corrosion; perfect seal-protective system IP 54 acc. to DIN 40050 provided by all-round soft rubber sealing the moulding; due to the special door mountings, the door does not swing in or out sideways on opening; door-frame and front-frame can be exchanged. The ready-assembled units cannot be opened by unauthorised persons without using force or special equipment.

Mini USB stick
 The mini USB memory stick is an ultra small flash drive offering up to 8GB data storage. Measuring just 31.3 x 12.4 mm, the mini USB drive is ideal for transporting data and fits inside the optional STD-99 lockable door.

DAQ Manager Software Box