

# FTR264RHT

Battery powered wireless RH and Temperature transmitter



Battery powered wireless humidity and temperature transmitter in robust ABS housing, suited for wall mounting.

Two types are available:

- FTR264RHT, RH and T transmitter
- FTR264RHT-2, same as above but with 2 additional external inputs for analog signals



Technic specifications:

Range	: 0..100%RH, -30..70°C
Accuracy	: ± 2%RH, ± 0,5°C
Send interval	: 4s .. 5 min.
Radio signal	: 433.92 MHz
max.range	: 20..100 m (dep. on situation)
Power supply	: 2x 3,6V Litium AA,2400mAh
Bat. life	: 1 to 3 year (dep. on send interval)
Dimensions	: 196 x 80 x 36mm

Applied in

- \* Laboratories
- \* Shopping malls
- \* cool rooms
- \* Out-door (with optional wethersheild)
- \* Storage rooms
- \* Computer rooms



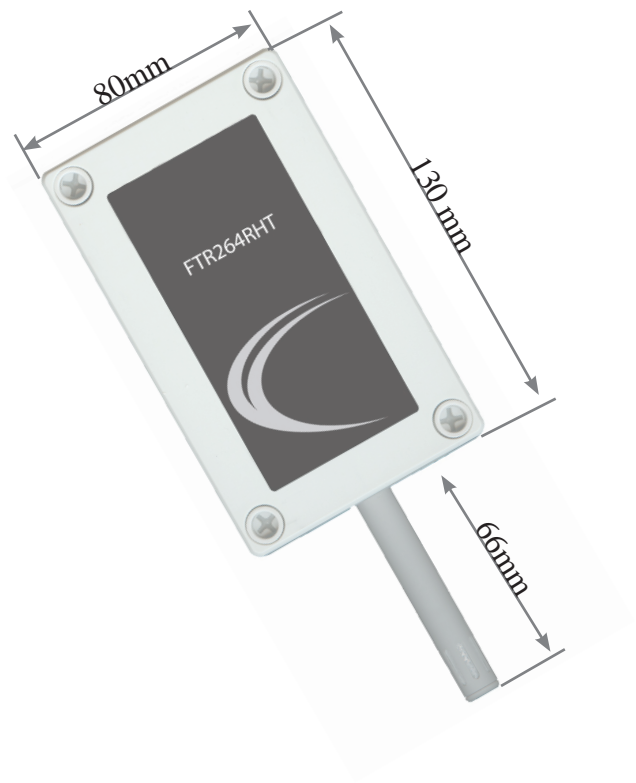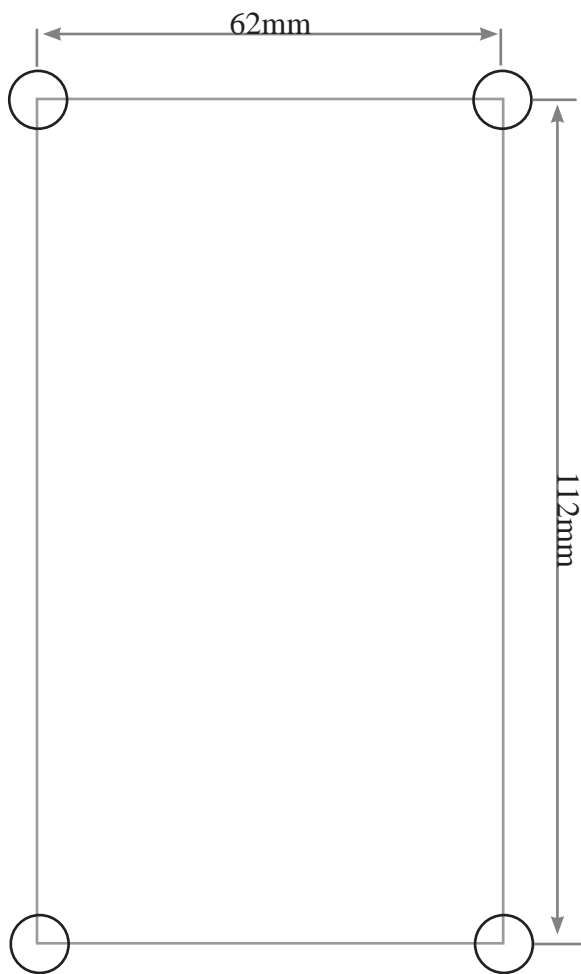

[www.pedak.nl](http://www.pedak.nl)

T: +31 475 4974247 F: +31 475 497425 E: [info@pedak.nl](mailto:info@pedak.nl)