

## optris® CTlaser G5

Non-contact glass temperature measurement with precise aiming from 100°C to 1650°C



### FEATURES

- Accurate glass temperature measurements on flat glass lines, container glass machines, bulb manufacturing and car glass finishing
- Temperature ranges from 100°C to 1650°C, measuring spots up from 1.0 mm and response times up from 10 ms
- Double laser aiming marks real spot location at any distance
- Compact sensor head size
- Usable up to 85°C ambient temperature without cooling and automatic laser switch off at 50°C
- Cooling and protection accessories for harsh environmental conditions

#### General Specifications

Environmental rating	IP 65 (NEMA-4)
Ambient temperature	-20°C to 85°C (sensing head, 50°C with laser ON) 0°C to 85 (electronics)
Storage temperature	-40 to 85°C (sensing head) -40°C to 85°C (electronics)
Relative humidity	10 - 95%, non-condensing
Vibration (sensor)	IEC 68-2-6: 3 G, 11-200 Hz, any axis
Shock (sensor)	IEC 68-2-27: 50 G, 11 ms, any axis
Weight	600 g (sensing head) 420 g (electronics)

#### Electrical Specifications

Outputs/analog	0/4 - 20 mA, 0-5/10 V, thermocouple J, K
Output/alarm	24 V/50 mA (open collector)
Optional	relay: 2 x 60 V DC/42 V AC <sub>eff</sub> , 0.4 A; optically isolated
Outputs/digital (optional)	USB, RS232, RS485, CAN, Profibus DP, Ethernet
Output impedances	mA max. 500 Ω (with 5-36 V DC) mV min. 100 kΩ load impedance thermocouple 20 Ω
Inputs	programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions)
Cable length	3 m (standard), 8 m, 15 m
Current draw	max. 160 mA
Power Supply	8-36 V DC
Laser 635 nm	1 mW, ON/OFF via electronic box or software

#### Measurement Specifications

Temperature range (scalable via programming keys or software)	100°C - 1200°C (G5L) 250°C - 1650°C (G5H) 200°C - 1450°C (G5HF) 400°C - 1650°C (G5H1F)
Spectral range	5.0 μm
Optical resolution (90 % energy)	45:1 (G5L, G5HF, G5H1F) 70:1 (G5H)
System accuracy <sup>2)</sup> (at ambient temp. 23 ± 5°C)	± 1% or ± 1,5°C <sup>1)</sup>
Repeatability (at ambient temp. 23 ± 5°C)	± 0.5% or ± 0.5°C <sup>1)</sup>
Temperature resolution (digital)	0.1 K
Exposure time <sup>3)</sup> (90% signal)	10 ms (G5HF, G5H1F) 80 ms (G5H) 120 ms (G5L)
Emissivity/Gain (adjustable via programming keys or software)	0.100 - 1.100
Transmissivity/Gain (adjustable via programming keys or software)	0.100 - 1.100
Signal processing (parameter adjustable via programming keys or software, respectively)	peak hold, valley hold, average; extended hold function with threshold and hysteresis
Software	optris Compact Connect


<sup>1)</sup> whichever is greater

<sup>2)</sup>  $\epsilon = 1$ , response time 1 s

<sup>3)</sup> with dynamic adaptation at low signal levels

## Optical specifications


### Chart SF optics, D:S = 45:1

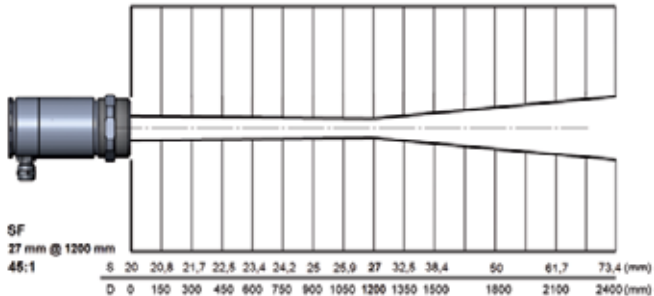

### Further optics, D:S = 45:1

...SF	27,0 mm @ 1250 mm
...CF1	1,6 mm @ 70 mm
...CF2	3,4 mm @ 150 mm
...CF3	4,5 mm @ 200 mm
...CF4	10,0 mm @ 450 mm

### Chart SF optics, D:S = 70:1

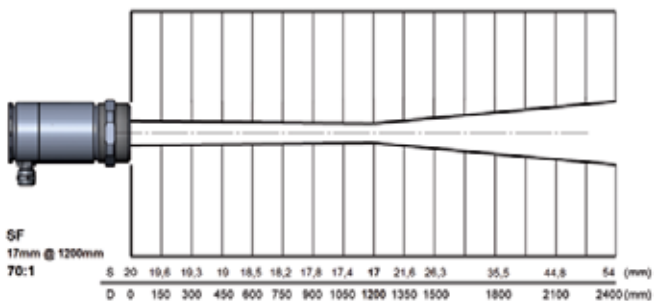


### Further optics, D:S = 70:1


...SF	17,0 mm @ 1200 mm
...CF1	1,0 mm @ 70 mm
...CF2	2,2 mm @ 150 mm
...CF3	2,9 mm @ 200 mm
...CF4	6,5 mm @ 450 mm

## Dimensions

### Sensing head

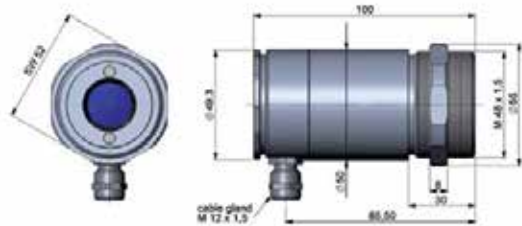

### Electronics

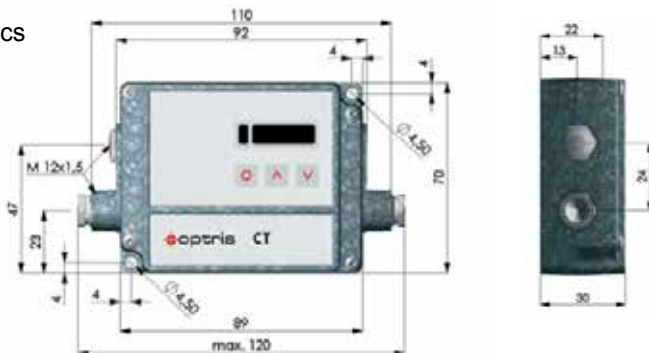

## Accessories (examples)

Mounting angle,  
adjustable in two axes  
(ACCTLAB)



Water cooling and air  
purge for sensing head  
(ACCTLW + ACCTLAP)



Mounting device for  
cooling housing  
(ACCTLRM)

