

Product	nLink+ differential pressure IP & EC (25Pa)	novasina The Art of Precision Measurement
Document	Datasheet	Novasina AG CH-8853 Lachen
	007474.00	Page 1 / 4

nLink+ IP AS A: Differential pressure sensor +/-25 Pa with analog Output



Dual channel transmitter with 2 analog signal output for the continuous measurement of differential pressure in a IP67 case. Can be ordered as a variant with 1 or 2 dP sensors.

Bidirectional differential pressure sensors based on dynamic (massflow) measurement with absolute pressure sensor included.

Configuration with USB cable for Windows PC.

Art-No:

2602079 nLink+ IP AS A 1* dP sensor +/-25Pa

2602141 nLink+ IP AS AA 2* dP sensor +/-25Pa

Technical Data

Name	nLink+IP AS A / nLink+IP AS AA
Measurement Range	-25 to +25 Pascal
Accuracy at 20°C	Typical +/- 0.15%
Temperature effect	Max. +/- 0.10Pa
Response time T63	<1s typ.
Max. Resolution	0.1 Pa
Long term stability	+/-0.05% FSS (typ)
Flow rate	<200ul/min
Ambient pressure dependency	Compensated with built in abs pressure sensor
Ambient pressure: Range	700 – 1260 hPa / mBar
Ambient pressure: Accuracy	+/- 0.5 hPa
Max. permissible overpressure	2 bar (burst pressure 4 bar)
General Specification	
Power supply	24V DC, Permissible voltage range: 5 to 39V
Power consumption	<0.5W
Display	none
Analogue outputs	2 scalable analogue outputs, current 0/4..20mA or voltage 0/2..10V
2* 0/4 - 20mA or 2* 0/2 - 10V	Accuracy <0.05% of span Linearity <0.05% of span Temperature effect 0.005% of span / °C Load (I): min. 0 Ω / max. 500 Ω or (Uin-2V)/Imax Load resistance (U): min. 10 kΩ / max. ∞ Ω
Status LED	LED for power On, LED for nSens connected
Housing material	ABS
Protection class	IP67
Soldering material	lead free (RoHS compliant)
Working temp.	0 to 50°C


Product	nLink+ differential pressure IP & EC (25Pa)	novasina The Art of Precision Measurement
Document	Datasheet	Novasina AG CH-8853 Lachen
	007474.00	Page 2 / 4

Electrical Installation

	Wire specification
Clamping range	0.13 - 1.5mm ² (Push-in Spring clip)
Wires:	w. plastic collar ferrule DIN 46228/4: 0,25 - 0.75 mm ² w. wire end ferrule DIN 46228/1: 0,25 - 1.50 mm ² Solid, min. H05(07) V-U 0.2 - 1.50 mm ² Wire connection cross section AWG28 - 14
CE-/EMC	Safety: IEC 61010-1:2010 EMC: IEC 61000-6-2:2016, EN 61000-6-2:2005 IEC 61000-6-3:2006+A1:2010, EN 61000-6-3:2007+A1:2011

Cable specifications depend on the installation and have to be defined by the designer or installer. Heavy machinery and other instrumentation should not share the same power supply wiring. Use noise filters and surge protectors if required.

Dimension & Schematics

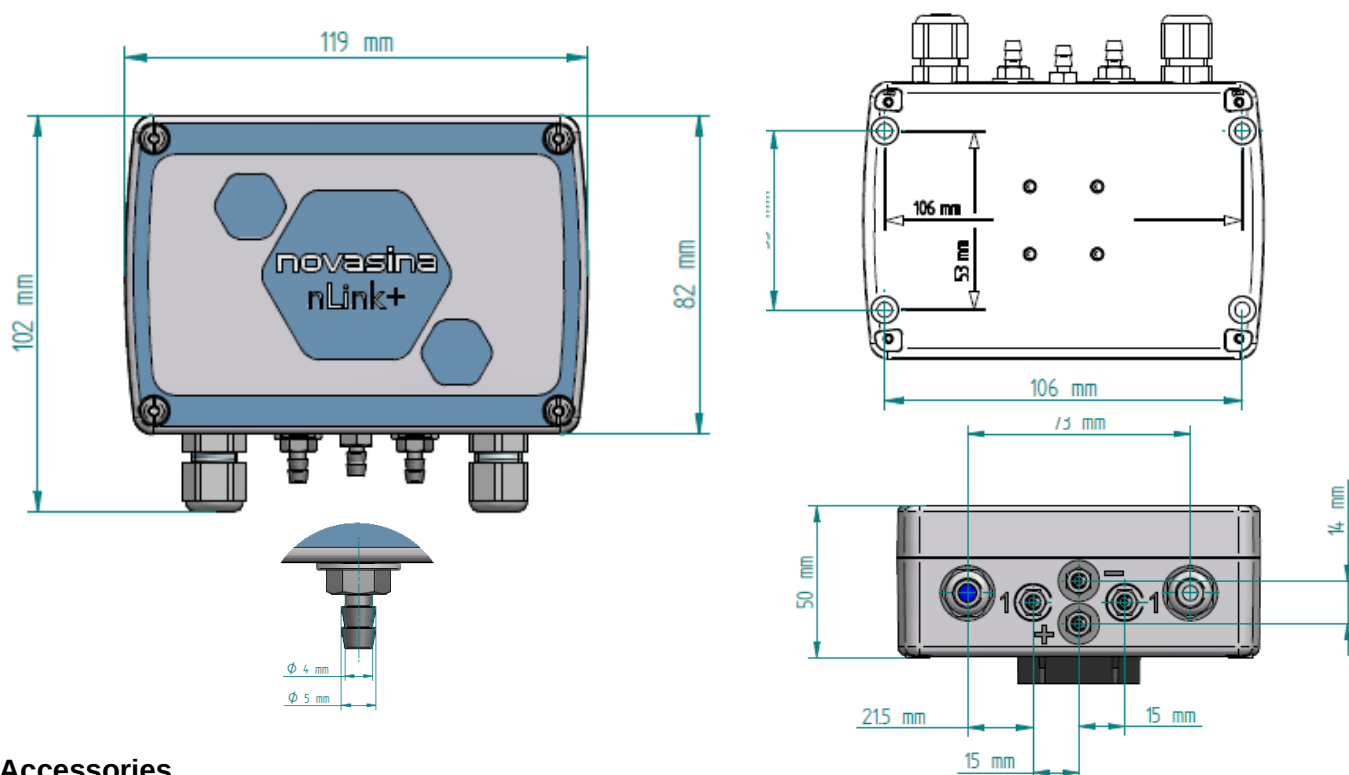

Accessories

Configuration & Calibration: nlink-USB	Wall mount / din rail mount
Configuration cable for nLink+ to Windows PC. nSoft-ACT-T Software available for download	
	
2601818: nlink-USB-CA3 (complete set)	2602053: wall / rail mount

Technical data subject to change without prior notice

Product	nLink+ differential pressure IP & EC (25Pa)	novasina The Art of Precision Measurement
Document	Datasheet	Novasina AG CH-8853 Lachen
	007474.00	Page 3 / 4

nLink+ EC AS A: Differential pressure sensor +/-25 Pa with analog Output



Dual channel transmitter with 2 analog signal output for the continuous measurement of differential pressure for mountain rail installation. Can be ordered as a variant with 1 or 2 dP sensors.

Bidirectional differential pressure sensors based on dynamic (massflow) measurement with absolute pressure sensor included.

Configuration with USB cable for Windows PC.

Art-No:

2602044	nLink+ EC AS A	1* dP sensor +/-25Pa
2602134	nLink+ EC AS AA	2* dP sensor +/-25Pa

Technical Data

Name	nLink+EC AS A / nLink+EC AS AA
Measurement Range	-25 to +25 Pascal
Accuracy at 20°C	Typical +/- 0.15Pa
Temperature effect	Max. +/- 0.10Pa
Response time T63	<1s typ.
Max. Resolution	0.1 Pa
Long term stability	+/-0.05% FSS (typ)
Flow rate	<200ul/min
Ambient pressure dependency	Compensated with built in abs pressure sensor
Ambient pressure: Range	700 – 1260 hPa / mBar
Ambient pressure: Accuracy	+/- 0.5 hPa
Max. permissible overpressure	2 bar (burst pressure 4 bar)
General Specification	
Power supply	24V DC, Permissible voltage range: 5 to 39V
Power consumption	<0.5W
Display	none
Analogue outputs	2 scalable analogue outputs, current 0/4..20mA or voltage 0/2..10V
2* 0/4 - 20mA or 2* 0/2 - 10V	Accuracy <0.05% of span Linearity <0.05% of span Temperature effect 0.005% of span / °C Load (I): min. 0 Ω / max. 500 Ω or (Uin-2V)/Imax Load resistance (U): min. 10 kΩ / max. ∞ Ω
Status LED	LED for power On, LED for nSens connected
Housing material	PA6.6 (UL94V0), mounting rail holder
Protection class	none, installation in protected cabinet required
Soldering material	lead free (RoHS compliant)
Working temp.	0 to 50°C

Product	nLink+ differential pressure IP & EC (25Pa)	novasina The Art of Precision Measurement
Document	Datasheet	Novasina AG CH-8853 Lachen
	007474.00	Page 4 / 4

Electrical Installation


	Wire specification
Clamping range	0.13 - 1.5mm ² (Push-in Spring clip)
Wires:	w. plastic collar ferrule DIN 46228/4: 0,25 - 0.75 mm ² w. wire end ferrule DIN 46228/1: 0,25 - 1.50 mm ² Solid, min. H05(07) V-U 0.2 - 1.50 mm ² Wire connection cross section AWG28 - 14
CE-/EMC	Safety: IEC 61010-1:2010 EMC: IEC 61000-6-2:2016, EN 61000-6-2:2005 IEC 61000-6-3:2006+A1:2010, EN 61000-6-3:2007+A1:2011

Cable specifications depend on the installation and have to be defined by the designer or installer. Heavy machinery and other instrumentation should not share the same power supply wiring. Use noise filters and surge protectors if required.

Dimension & Schematics

nLink+ EC AS A

nLink+ EC AS AA

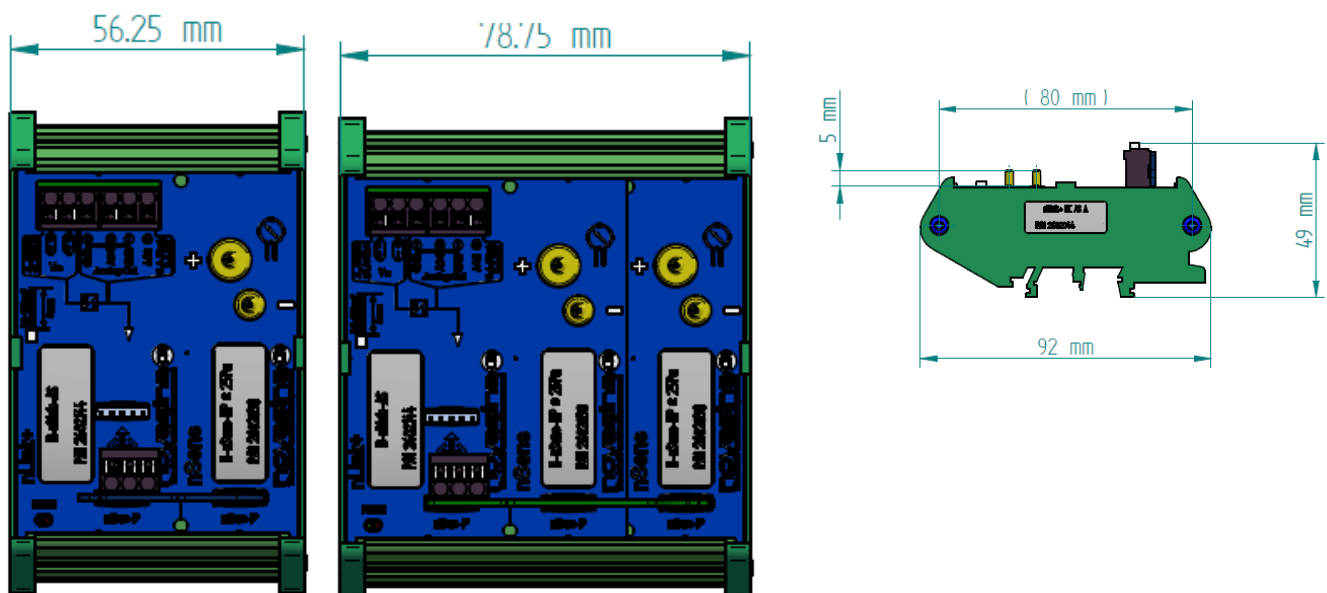

Accessories

Configuration & Calibration: nlink-USB

Configuration cable for nLink+ to Windows PC.
nSoft-ACT-T Software available for download



2601818: nlink-USB-CA3 (complete set)

Technical data subject to change without prior notice