

Product	nLink+ IP MR	novasina The Art of Precision Measurement
Document	Datasheet	Novasina AG CH-8853 Lachen
	007553.00	Page 1 / 2

nLink+ IP MR for external nSens probes (IP67 protected case, RS485 interface)



Modbus transmitter in IP67 case.

Configuration with USB cable for Windows PC.
Configuration possible without external power supply.


Compatible with all exterior nSens sensor (such as nSens-HT-EIS, Sens-dP etc) and extension cables.

Art. Nr. 260 2224 nLink+ IP MR (no sensor included)

Technical Data

Name	nLink+ IP MR(Art-Nr 2602224)
Power supply	24V DC, Permissible voltage range: 5 to 48VDC
Power consumption	<0.5W
Display	none
Outputs	ModbusRTU (all climate values and diagnostic information as described in the Modbusregister)
Status LED	LED for power On, LED for nSens connected
Housing material	ABS
Protection class	IP67
Soldering material	lead free (RoHS compliant)
Working temp.	0 to 50°C
Storage temperature	-10 to 60°C (non-condensing)

Electrical Installation

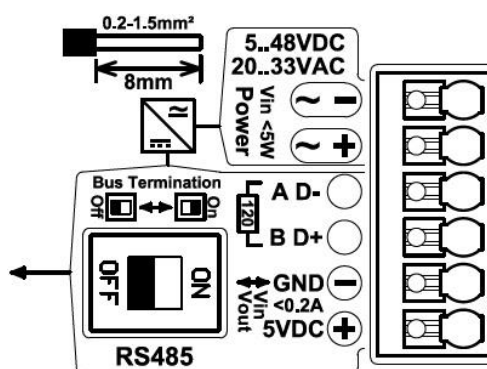

	Wire specification
Clamping range	0.13 - 1.5mm ² (Push-in Spring clip)
Wires:	w. plastic collar ferrule DIN 46228/4: 0,25 - 0.75 mm ² w. wire end ferrule DIN 46228/1: 0,25 - 1.50 mm ² Solid, min. H05(07) V-U 0.2 - 1.50 mm ² Wire connection cross section AWG28 - 14


Product	nLink+ IP MR	novasina The Art of Precision Measurement
Document	Datasheet	Novasina AG CH-8853 Lachen
	007553.00	Page 2 / 2

Cable specifications depend on the installation and have to be defined by the designer or installer. Heavy machinery and other instrumentation should not share the same power supply wiring. Use noise filters and surge protectors if required.

For EMC protection it is recommended to take the following measures:

- Wires emitting interference must be separated from measurement and analysis units
- Parallel guidance of measurement cables and electrical power cables must be avoided, use different channels with separation (see European Standard EN50170 for detailed information)

Dimension & Schematics

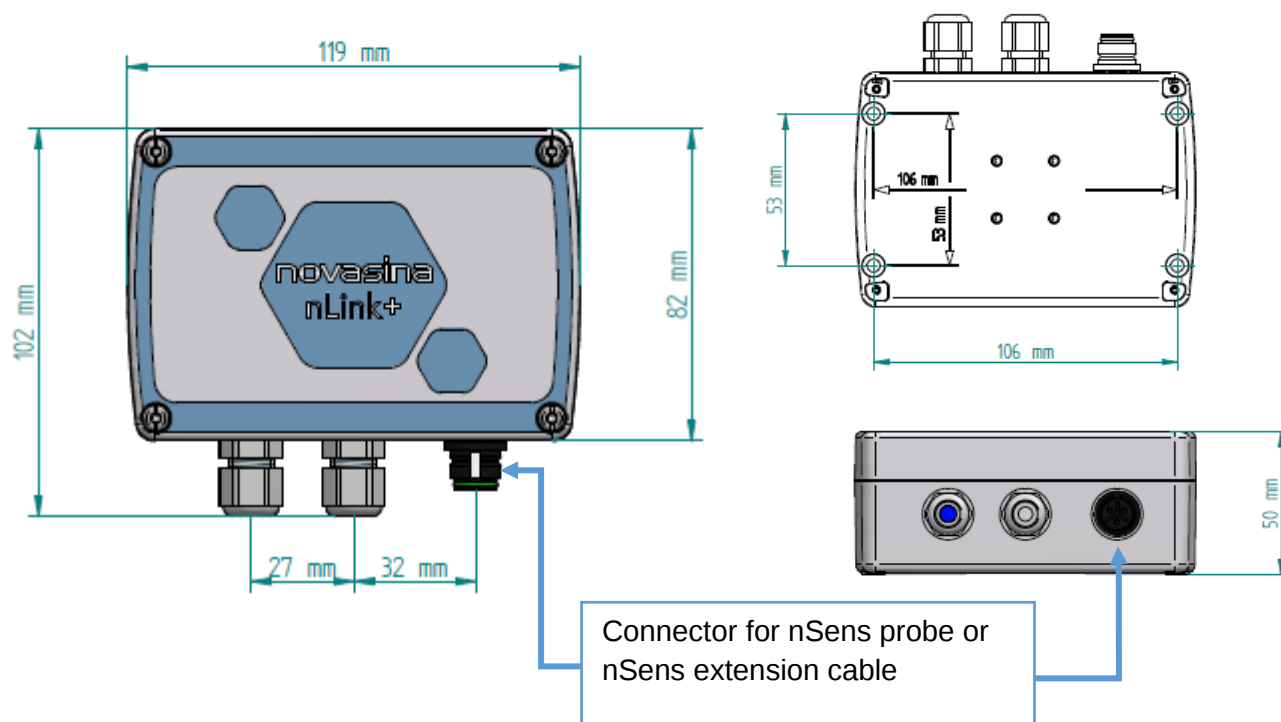

Sensor cables and Configuration set

nSens cable extensions	Configuration cable: nlink-USB	Wall mount / din rail mount
Extension cable between transmitter and nSens.	Configuration cable for nLink+ to Windows PC. Software available for download	
		
260 1201 nSens Extension 2m 260 1136 nSens Extension 5m 260 1986 nSens Extension 10m 260 1987 nSens Extension 30m	260 1818 nlink-USB-CA3 (complete set)	2602053: wall / rail mount

Technical data subject to change without prior notice